

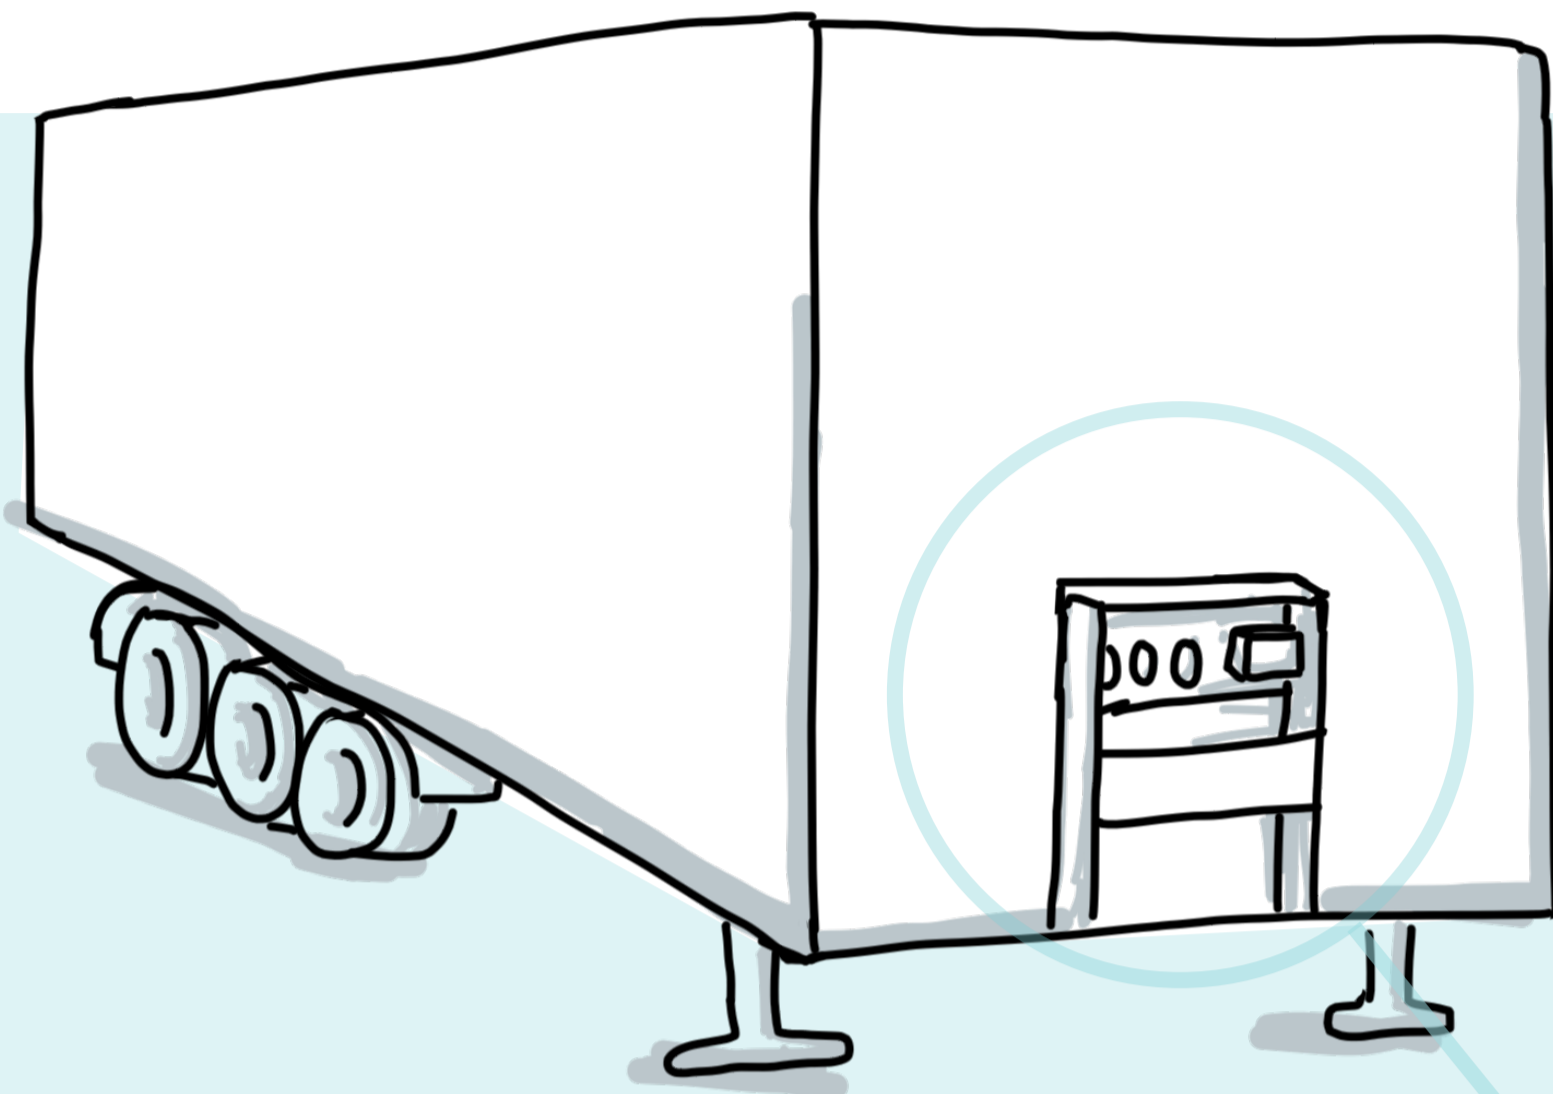


# ATTACHING THE BEACON TO THE FRONT WALL OF THE TRAILER

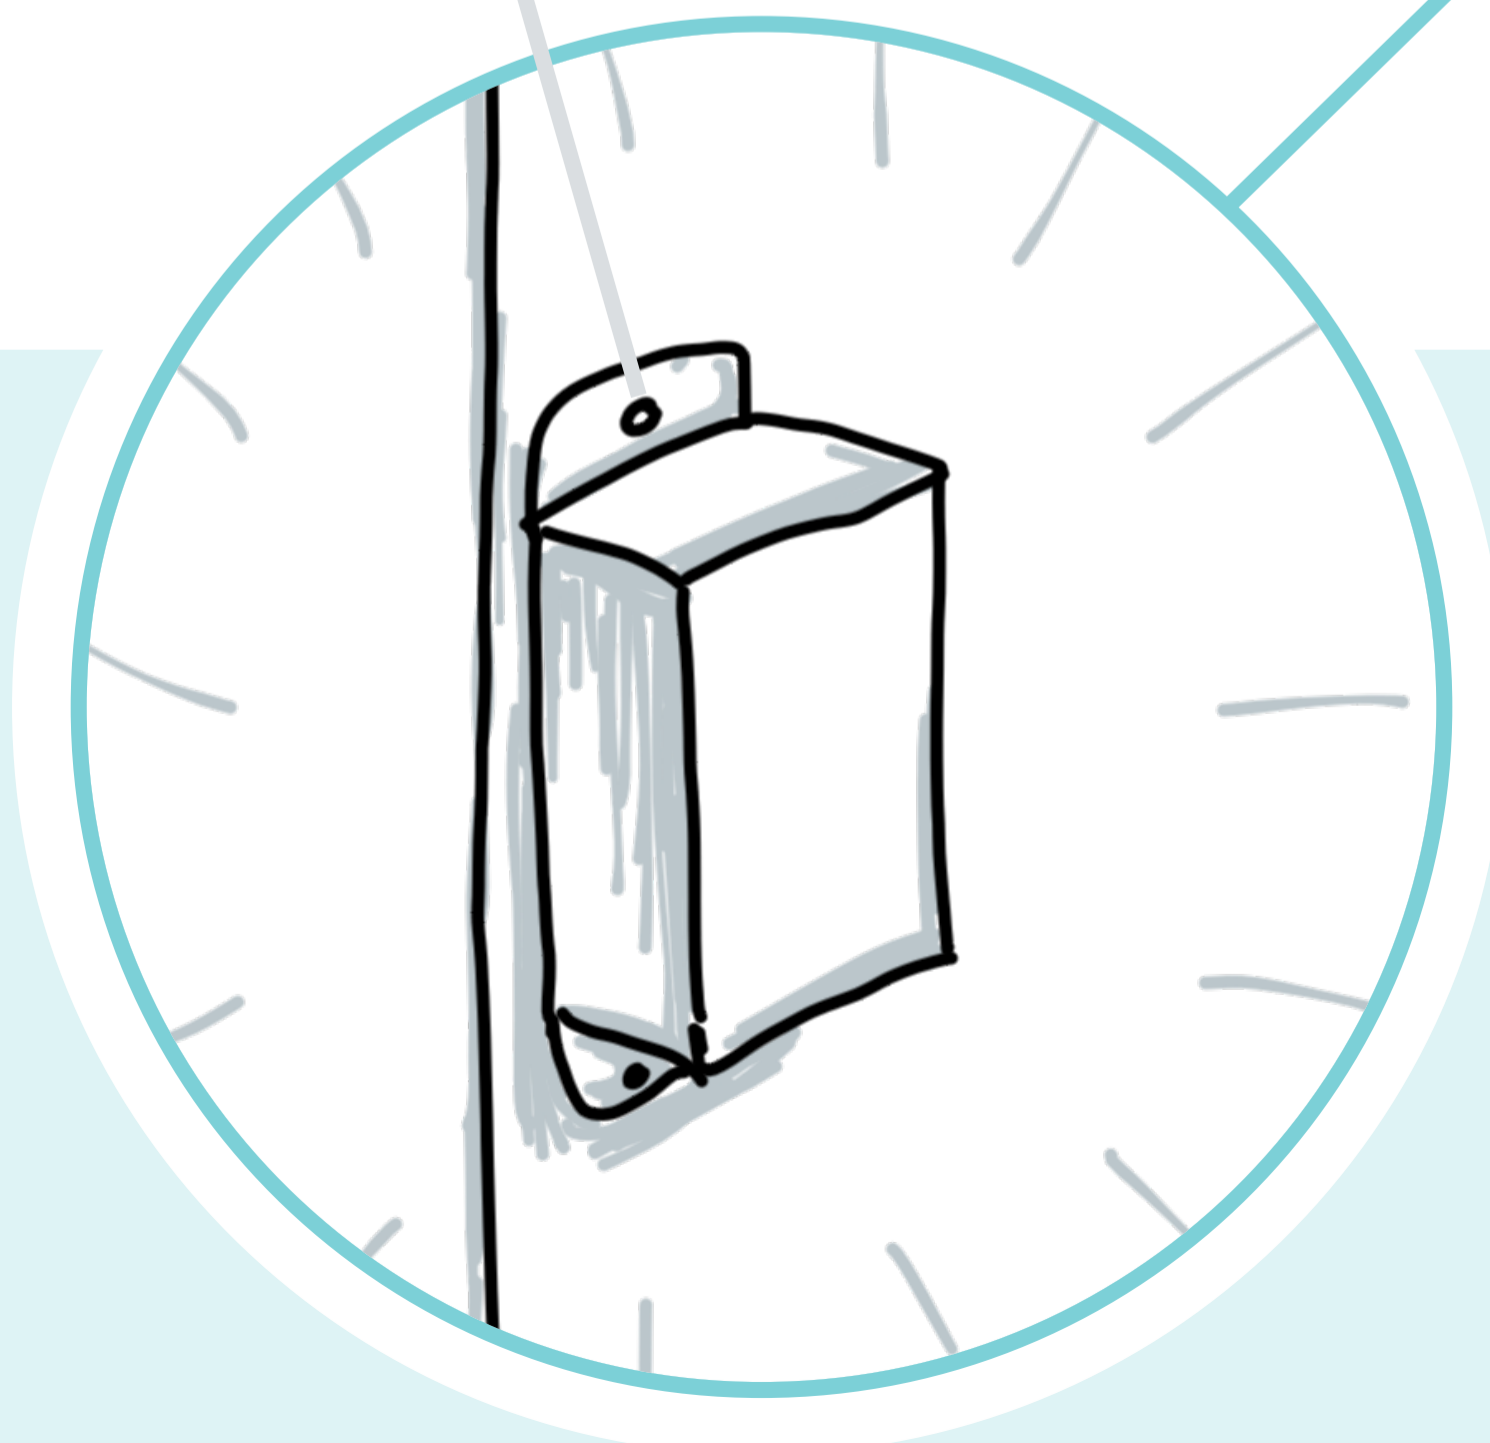

The screw connection on the **inside of the cable gantry** on the left or right allows the best transmission power and provides protection against external influences

5er/6er screws or rivets for fixing the beacon device

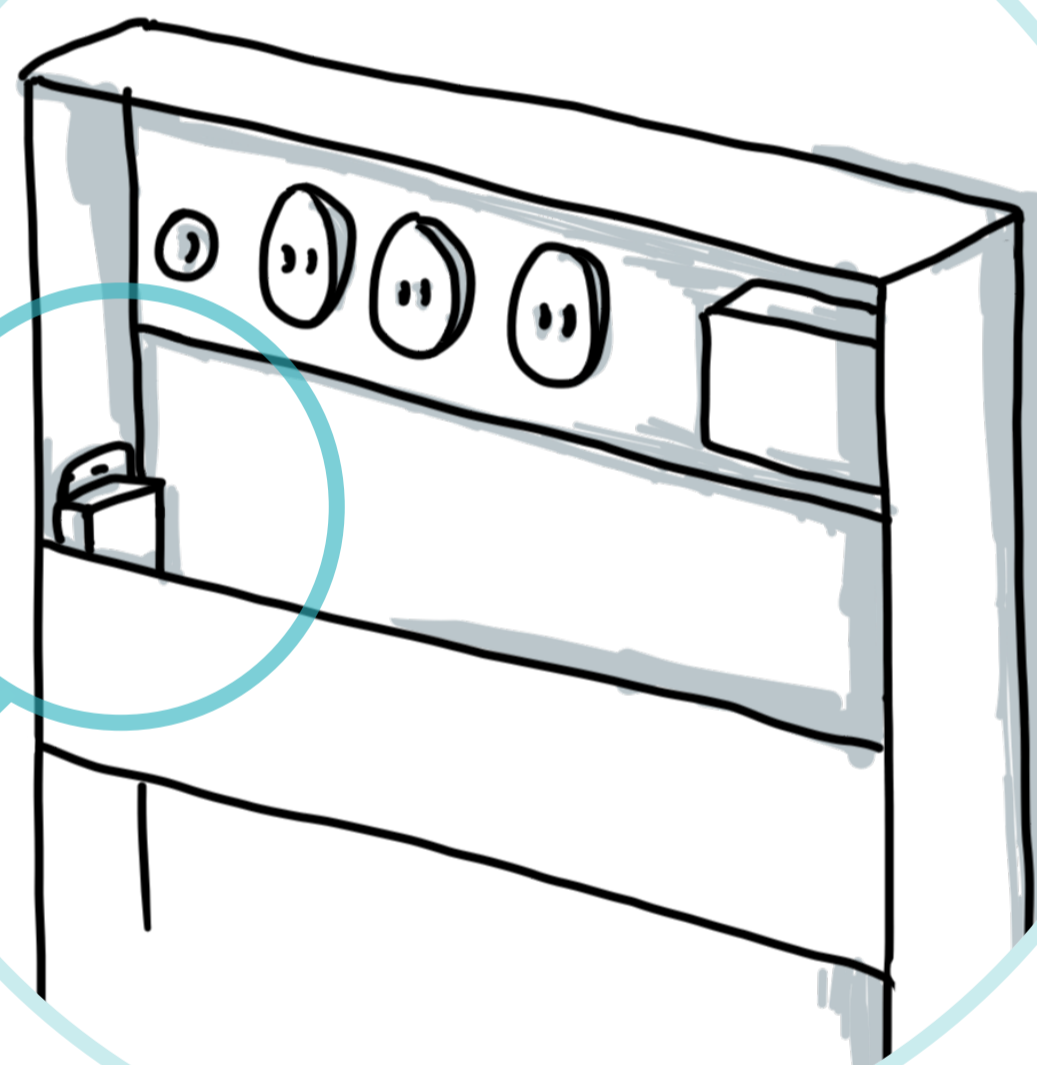

- ✓ Optimum protection against damage
- ✓ High transmission power
- ✓ Theft prevention by sight protection